



Smart  
Video  
Systems

# SVS-12A5

## DC12V Switch Power Supply

### FEATURE

- 60W Single Output Switching Power Supply
- Output voltage & current: DC12V 5A
- Input voltage range: 100~264VAC
- Built in EMI filter with tiny ripple
- 100% full load burn-in test
- Air Cooling
- Built-in constant current limiting circuit (C.C.+C.V.mode);
- Protection: Short circuit/ Overload/ Over voltage/ Over temperature



CE FC



Short circuit





Overload



Over voltage



AC-DC

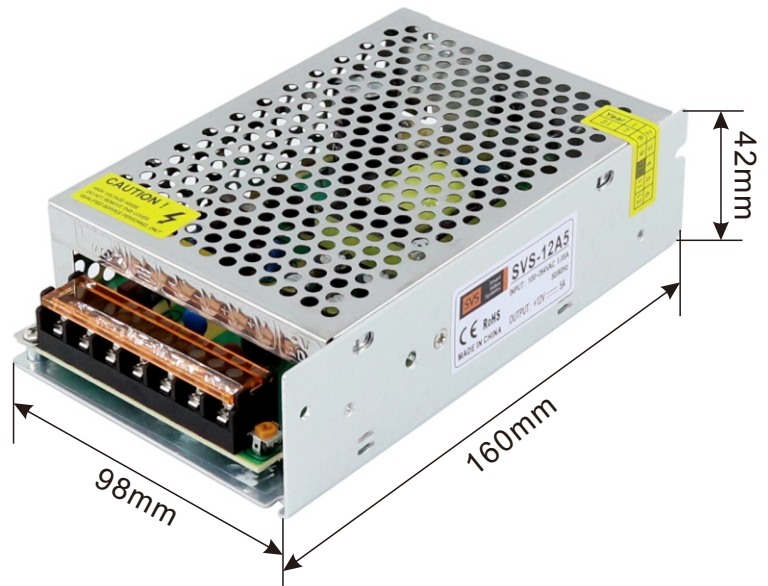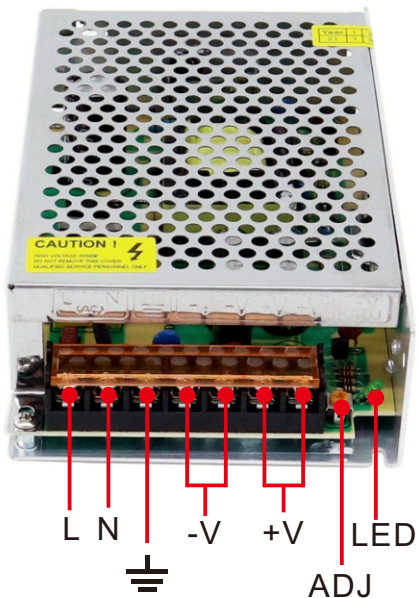

#### AC Input

L: Light

N: Naught

F/G: Safe ground

#### DC Output

-V: output Voltage is Negative +V: output Voltage is Positive

ADJ: output Voltage Adjustment

## SPECIFICATION

	Model	SVS-12A5
<b>Output</b>	DC output Voltage	12V±10%
	Output Current Range	0-5A
	Wave and Noise	120mVp-p
	DC output Power	60W
	Efficiency	85%
	DC Voltage Adjustable Scope	(at full load) ≤0.5%
<b>Input</b>	Voltage Range	100~264VAC 47-63Hz
	Input Current	0.54A/115V, 0.27A/230V
	Leakage Current	<1mA/ 240VAC
	Inrush Current	Cold start 20A/120VAC, 40A/230VAC
<b>Protection</b>	Over-load	105%~135%, Protection type: Constant current limiting, recovers automatically after fault condition is removed
	Over-voltage	105%---150% Rated Voltage, Protection type: Shut off
	High-temperature	RTH3 ≥65°C FAN ON ≤55°C FAN OFF ≥80°C Cut off output(5~15V)
<b>Environment</b>	Working temperature & humidity	-10°C~+50°C, 20~90%RH
	Store temperature & humidity	-20°C~+85°C, 10~95%RH
	Temperature coefficient	±0.03%/°C(0~50°C)
	Vibration	10~500Hz, 2G 10min./1cycle, Period for 60min, EACH AXES
<b>Safety</b>	Withstand voltage	I/P-O/P: 1.5KVAC, I/P-FG: 1.5KVAC, O/P-FG: 0.5KVAC
	Isolation resistance	I/P-O/P, I/P-FG, O/P-FG: 100M Ohms/500VDC
<b>Standard</b>	CE EMC Standard	EN55015:2013+A1:2015, EN61547:2009, EN61000-3-2:2014, EN61000-3-33:2013
	CE LVD Standard	EN61347-2-13:2014+A1:2017, EB61347-1:2015
	ROHS Standard	IEC 62321: 2013, EPA3050B:1996, EN1122:2001, EPA3052:1996, EPA3060A, etc.
<b>Other</b>	Dimension	160*100*42mm (L*W*H)
	Weight	0.41kg
<b>Notes</b>	<p>1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.</p> <p>2. Ripple &amp; noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf &amp; 47uf parallel capacitor.</p> <p>3. Tolerance : includes set up tolerance, line regulation and load regulation.</p> <p>4. I/P-O/P: Input and output interval, I/P-FG: Input and enclosure, O/P-FG: Output and enclosure</p>	



Smart  
Video  
Systems

## Smart Video Systems (SVS)

<http://www.sv-systems.com.ua>

Email: [v.savoskin@sv-systems.com.ua](mailto:v.savoskin@sv-systems.com.ua)

Тел.: +38 097 236-77-61

Address: Київ, Чугуївський провулок, 21, кім. 2-6